

Application

This series of fuses are suitable for AC 50-60 Hz , rated voltage up to 690V and rated current up to 125a . It is mainly used as short circuit protection (GG / GL) of electrical circuit and can also be derived into semiconductor equipment-and its complete assembly of short circuit protection (AR) and motor short circuit protection (AM) . The rated breaking capacity of this series of fuses is up to 50KA.




Specifications

Product Model	RT18-125AM
Pole	1P/2P/3P
Colour	White
Rated Current (A)	10, 16, 20, 25, 32, 40, 50, 63, 80, 100, 125
Rated Voltage(V)	500
Breaking capacity(kA)	50
Installation	Rail installation
Fuse link size(mm ²)	22*58


Features

- 1. Din35 Rail Installation,Easy to Install
- 2. Adjustable terminal block,Wiring firm
- 3. Fire-retardant shell,high temperature resistance
- 4. Flexible installation,Easy to replace

Installation

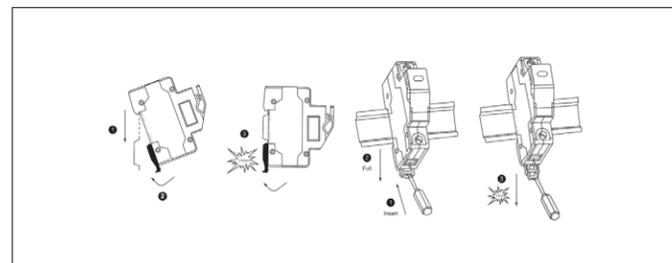

Dimension

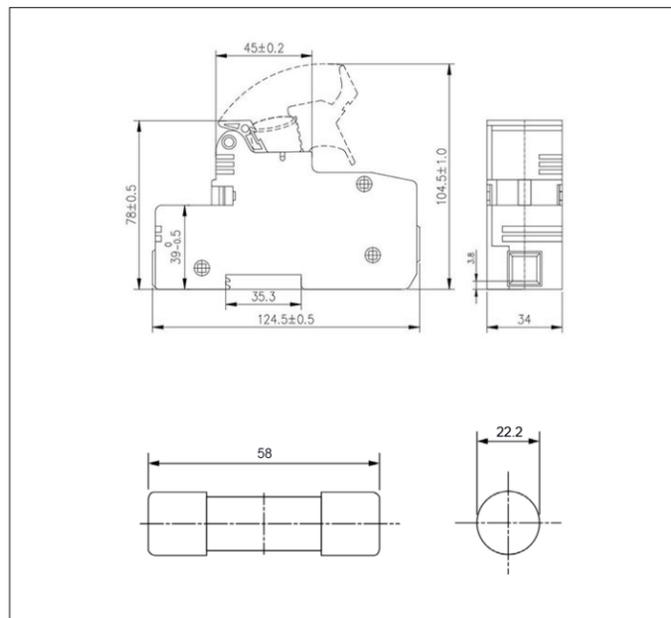

Replacement fuse

