

Application

A range of fuses in a 14x65mm package specifically designed for protection and isolation of photovoltaic strings. The DC fuses are capable of interrupting low overcurrents associated with faulted PV (reverse current, multi-array fault) string arrays.




Specifications


Product Model	YRPV-63
Colour	White
Breaking capacity	25kA
Rated Current (A)	10A, 15A, 20A, 25A, 32A, 40A, 50A, 63A
Rated Voltage(V DC)	1000/1500
Installation	Rail installation
Fuse link size(mm ²)	14*65

Features

- 1. Rated voltage 1000VDC/1500VDC
- 2. Rated breaking capacity 25kA dc
- 3. Minimum interrupting rating 1.3x I_n
- 4. Time constant under 1ms
- 5. Standard EN/ IEC 60269-6

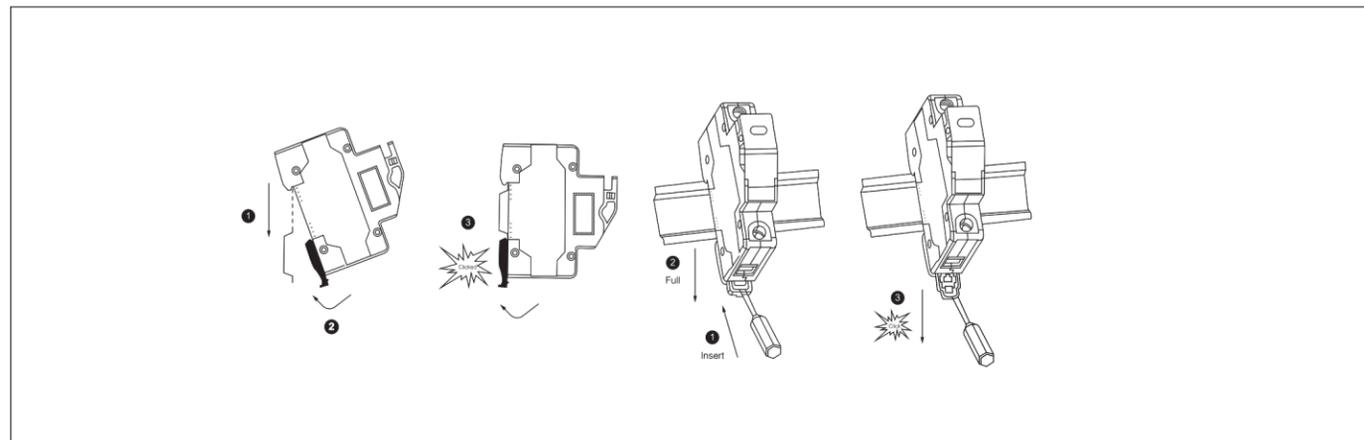

Replacement fuse

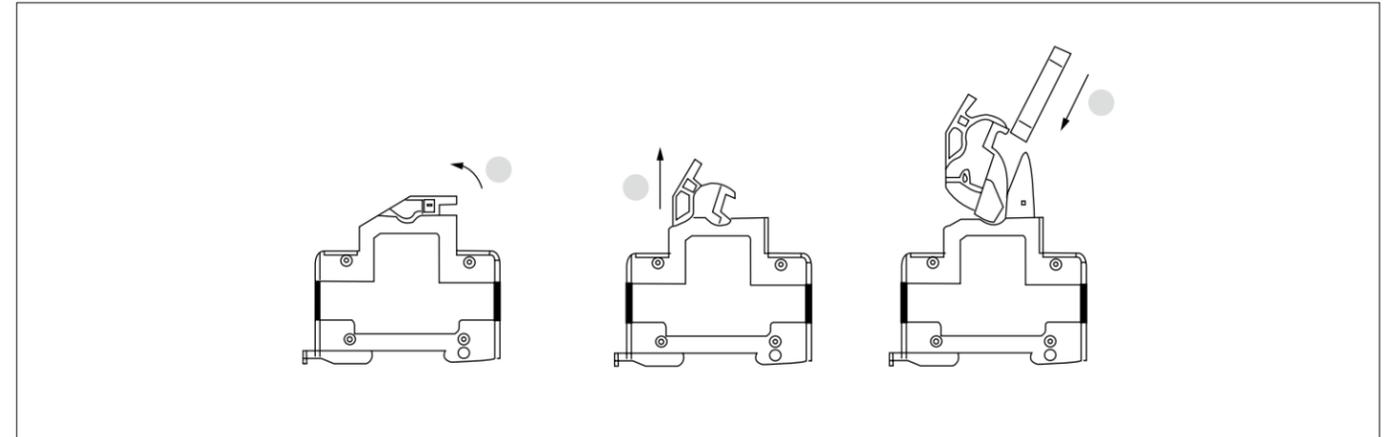

Dimension

